



Rec'd PCT/PTO 23 OCT 2003
PCT/GB 2003/09/258
MAR 2005



INVESTOR IN PEOPLE

10/528804

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 23 OCT 2003

WIPO PCT

REC'D 23 OCT 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Stephen Hordley

Dated

9 October 2003

BEST AVAILABLE COPY

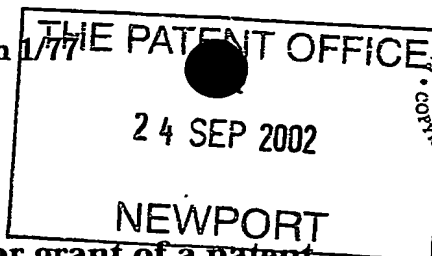

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference GBP0277
24SEP02 E750442-1 D10033
P01/7700 0.00-0222079.6

2. Patent application number
(The Patent Office will fill in this part) 0222079.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)
DYSON LIMITED
Tetbury Hill
Malmesbury
Wiltshire SN16 0RP

Patents ADP number (if you know it)

8061301001

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention
A VACUUM CLEANING HEAD

5. Name of your agent (if you have one)
CAGE, John, D. & SMITH, Gillian, R.
Intellectual Property Department
Dyson Limited
Tetbury Hill
Malmesbury
Wiltshire SN16 0RP

"Address for service" in the United Kingdom to which all correspondence should be sent (Including the postcode)

Patents ADP number (if you know it)

7890783002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	15
Claim(s)	4
Abstract	1
Drawing(s)	9 + 9

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

CAGE, John, D.

Signature

John D. CAGE

Date

19 September 2002

12. Name and daytime telephone number of person to contact in the United Kingdom Sally Hutchings 01666 828459

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

GBP0277

A Vacuum Cleaning Head

5 This invention relates to a vacuum cleaning head which can be used with, or form part of, a vacuum cleaner.

Vacuum cleaners are generally supplied with a range of tools for dealing with specific types of cleaning. The tools include a floor tool for general on-the-floor cleaning. It is well-known to provide a floor tool in which a brush bar is rotatably mounted within a suction opening on the underside of the tool, with the brush bar being driven by an air turbine. The brush bar serves to agitate the floor surface beneath the tool so as to release dirt, dust, hair, fluff and other debris from the floor surface where it can then be carried by the flow of air to the vacuum cleaner itself. The turbine can be driven solely by 'dirty' air which enters the tool via the suction opening, it can be driven solely by 'clean' air which enters the tool via a dedicated inlet which is separate from the main suction opening, or it can be driven by a combination of dirty and clean air. 'Dirty air' turbine-driven tools have a disadvantage in that they can easily become fouled by the dirty airflow. They also have a disadvantage in that the speed at which the turbine rotates can increase quite rapidly when the tool is lifted from a surface.

US 5,950,275 and DE 42 29 030 both show dirty air turbine-driven tools where a speed limiting function is operable when the tool is lifted from a surface. In one of the tools, the speed limiting device is a floor engaging wheel which controls the angular position of an air inlet with respect to the turbine.

'Clean air' turbine-driven tools can also suffer from an increase in speed under certain conditions. A full or partial blockage of the airflow path through the main suction inlet to the tool can cause an increased amount of air to flow through the air turbine inlet, which increases the speed of the turbine and the brush bar. However, in view of the different causes of an overspeed condition in clean air and dirty air turbine-driven

tools, the solutions proposed for dirty air turbine-driven tools are unsuitable for use in clean air turbine-driven tools.

Accordingly, a first aspect of the present invention provides a vacuum cleaning head
5 comprising a housing, an agitator for agitating a floor surface which is rotatably mounted in the housing, an air turbine for driving the agitator, an air inlet for admitting air to the turbine, and a control for preventing rotation of, or reducing the speed of rotation of, the agitator, wherein the control is responsive to the speed of rotation of the turbine, or flow of air to or through the turbine.

10 The control can take the form of a mechanical arrangement which directly responds to the speed of rotation of the turbine. A centrifugal braking mechanism can be fitted to the drive shaft from the turbine, with braking elements moving radially outwards to act on a braking surface surrounding the drive shaft when the speed of rotation of the
15 turbine exceeds a predetermined limit. Alternatively, a centrifugal clutch can be fitted in the drive shaft from the turbine. These arrangements have the advantage of providing the user with a warning noise when they operate.

20 More preferably, the control is a valve which is movable between an open position, in which it admits air to the turbine, thereby allowing the turbine to drive the agitator, and a closed position in which it prevents air from reaching the turbine, thereby preventing the turbine from driving the agitator.

25 The control can comprise a movable part having an interior volume which communicates with the main airflow path to the turbine, the movable part being responsive to a pressure difference between the interior volume and ambient air.

Preferably the control is also movable into the inoperable position by a user, such as when a user decides to use the cleaning head on a hard floor or delicate surface.

30 Providing one control which can either be manually or automatically operated to turn off the agitator has a considerable benefit in making the cleaning head easier to use.

In a turbine driven tool which has a dedicated air inlet for air to drive the turbine which is separate from the main, floor engaging inlet, there can be a difficulty in driving the turbine at a sufficient speed. When viewed in terms of the amount of resistance experienced by the airflow, the path through the main inlet offers a lower resistance than the path through the turbine inlet. Thus, the airflow will tend to take the lower resistance path through the main inlet.

A second aspect of the present invention seeks to improve the operation of the turbine driven tool.

Accordingly, a second aspect of the present invention provides a vacuum cleaning head comprising a housing, an agitator for agitating a floor surface, a chamber in the housing for rotatably receiving the agitator, an opening in the chamber, adjacent the agitator, for facing a floor surface, an air turbine for driving the agitator, an air inlet in the housing for admitting clean air to drive the turbine, a restricting device for fitting in a discharge outlet from the chamber, and wherein the restricting device is arranged to be movable between a restrictive position, in which it serves to restrict the cross-section of the discharge outlet, and an open position, in which it restricts the cross-section of the discharge outlet to a lesser extent, the restricting device being movable by the flow of debris from the chamber.

Positioning a movable restricting device in the discharge outlet allows the outlet to be sufficiently large to allow the occasional passage of debris. The cross-section of the outlet, with the restricting device in the restrictive position, is sufficiently small to maintain an adequate balance of airflow between the main opening to the cleaning head and the air inlet to the turbine.

In each aspect of the invention, the vacuum cleaning head can be a tool which attaches to the end of a wand or hose of a cylinder (canister, barrel) or upright vacuum

cleaner, or it can form part of a vacuum cleaner itself, such as the cleaning head of an upright vacuum cleaner.

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows a turbine-driven tool in accordance with the invention;

Figure 2 schematically shows a vacuum cleaning system in which the tool can be used;

Figure 3 shows a cross-section through the tool of Figure 1 with the air inlet to the turbine open;

Figure 4 shows a cross-section through the tool of Figure 1 with the air inlet to the turbine closed;

Figure 5 shows an exploded view of the components of the tool shown in the previous Figures;

Figure 6 shows a modification to the tool to allow the air inlet to be reopened;

Figure 7 shows an alternative way in which the tool can be modified to allow the air inlet to be reopened;

Figure 8 shows a cross-section through a turbine driven tool which incorporates a device for restricting the cross-section of the outlet path from the brush bar housing;

Figures 9 and 10 show the restricting device itself;

Figure 11 shows a cross-sectional view through the tool of Figure 8.

Figures 12 to 14 show alternative forms of the restricting device.

Figure 1 shows an embodiment of the tool in the form of a tool 100 which can be
5 fitted to the end of a wand or hose of a vacuum cleaner.

The main housing of the tool defines a chamber 110 for the brush bar 112, a chamber
115 for the turbine 240 and flow ducts between these parts. The forward, generally
hood-shaped, part 110 of the housing and a lower plate together define a chamber for
10 housing the brush bar. The brush bar comprises two brush bars 112 of equal size
which are supported, cantilever fashion, from a part of the driving mechanism
positioned in the centre of the chamber 110. The lower plate has a large aperture 111
through which the bristles of the brush bars 112 can protrude to agitate the floor
surface. The lower plate is fixed to the remainder of the housing by quick release
15 (e.g. quarter turn) fasteners so that the plate can be removed to gain access to the
brush bars 112.

Two wheels 102 are rotatably mounted to the rear part of the housing to allow the tool
to be moved across a floor surface.
20

The air outlet of the tool comprises a first part 107 which is pivotally mounted about a
horizontally aligned axis 103 on the main housing so as to permit pivotal movement
in a vertical plane. A second part, in the form of an angled pipe portion 106, is
rotatably connected, about an axis 104, to the end of part 107. Such an arrangement
25 allows a good level of manoeuvrability of the floor tool 100 when in use and is
commonly employed in known floor tools. Further description of the articulation of
these components is unnecessary. The outlet 105 of the angled pipe portion 106 is
shaped and dimensioned so as to be connectable to the wand of a domestic vacuum
cleaner.

Figure 2 schematically shows the overall vacuum cleaning system in which the tool can be used. The tool 100 is connected to the distal end of a rigid wand or pipe 20 which a user can manipulate to direct the tool 100 where it is needed. A flexible hose 30 connects the wand 20 to the main body 70 of the vacuum cleaner. The main body 70 of the vacuum cleaner comprises a suction fan 50 which is driven by a motor 55. The suction fan 50 serves to draw air into the main body 70 of the vacuum cleaner via the tool 100, wand 20 and hose 30. Filters 45 and 60 are positioned each side of the fan. Pre-motor filter 45 serves to prevent any fine dust from reaching the fan and post-motor filter 60 serves to prevent any fine dust or carbon emissions from the motor 55 from being expelled from the cleaner. A separator 40 such as a cyclonic separator or filter bag serves to separate and dirt, dust and debris from the dirty airflow which is drawn into the main body 70 by the suction fan 50. All separated matter is collected by the separator 40. In use, the suction force created by suction fan 50 draws air into the tool via the main suction inlet 111 on the underside of the tool and through the turbine air inlet 120. Air flowing through inlet 120 is used to drive the turbine before flowing along parts 107 and 106 towards the main body of the vacuum cleaner. Dirty air which is drawn through the main suction inlet flows along parts 107 and 106 and does not pass through the turbine at all. In this way, the turbine does not become fouled with dirt and debris from the dirty airflow.

The turbine and the control mechanism for the turbine will now be described in detail with reference to Figure 3. The impeller 240 of the turbine is mounted about a drive shaft 245 within chamber 115. A set of bearings 246, 247 rotatably supports the drive shaft 245 at each of its ends. An air inlet 120 to the turbine is positioned at end 200 of the housing and an air outlet of the turbine is mounted at end 280. Airflow through the turbine is in a generally axial direction from left to right in Figure 3.

A driving mechanism connects the turbine and the brush bars and serves to transmit torque from the turbine 240 to the brush bars 112. The driving mechanism comprises a first pulley 262, which is driven by the output shaft 245 of the turbine, a second,

larger diameter, pulley at the brush bar, and a belt 260 which encircles the two pulleys. A casing 251, 252 surrounds the belt 260 to prevent the ingress of dust.

The inlet side of the turbine comprises a movable button 200 which is resiliently mounted about an inlet cap 220. The button 200 has an inner annular hub 201 and an outer annular hub 202. A spring 215 fits within the inner hub 201 and acts between the inside face of the central part 203 of the button 200 and a surface on the guide vane plate 230 and serves to urge the button 200 axially outwards. The outer annular hub 202 is joined to the housing by a flexible annular shaped diaphragm seal 210. As will be described in more detail below, the button 200 is axially movable from an 'open' position, as shown in Figure 3, to a 'closed' position, as shown in Figure 4. In the closed position the button 200 moves axially inward to a position where the diaphragm seal 210 presses against the outer surface of the inlet cap 220 so as to form an airtight seal at the inlet.

The outermost surface of the button 200, between the inner 201 and outer 202 annular hubs, comprises a plurality of radial ribs 206, with the spaces between adjacent ribs defining air inlet apertures 205. The inlet apertures 205 are shielded by a finely graded mesh which serves to prevent dust from being carried into the turbine and fouling the mechanism. The passage between the outer annular hub 202 and diaphragm seal 210, and the inner annular hub 201, defines an airway 120 for the incoming airflow which drives the impeller 240. The circumference of the guide vane plate 230 supports a set of angled vanes 232. The angle of the vanes 232 serves to initiate a swirling flow of air around the housing which is matched to the angle of the blades on the impeller 240. The main airflow path through the turbine is shown by arrows 244. The impeller 240 shown here is an inward radial flow (IFR) turbine, which has been found to be well-suited to the pressure and flow rates in this application. However, it will be apparent that other types of turbine could be used, such as a Pelton Wheel.

There is also a secondary flow of air which plays an important part in operating the button 200 during an overspeed condition. The generally flat side of the impeller 240 (the left hand side of the impeller 240 in Figure 3) has a plurality of depressions 242 defined in it, separated by ribs 243. In use, these depressions 242 and ribs 243 act as a miniature impeller, which will hereafter be called a secondary impeller 244. Obviously, since the secondary impeller 244 is the rear face of the impeller 240, the two rotate at the same speed. The pumping effect of the secondary impeller 244 is proportional to the rotational speed of the impeller 240. This causes a region of low pressure between the guide vane plate 230 and impeller 244. A plurality of axially directed apertures 234 in the supporting plate 230 join the region directly behind the impeller 244 with the region inside the button 200. The region inside the button is effectively a chamber which is separated from the main airflow path, except for the restricted path through the apertures 234. The only other flow into region 216 is a small, inevitable, leakage between the inner annular hub 201 of button 200 and the part of the inlet cap 220 against which the button 200 slides. The size of the apertures 234 is a trade off between being sufficiently large so as to effectively communicate the pressure behind the impeller 244 to the region 216 inside the button 200, and sufficiently small so that a large enough pressure difference is present in button 200 to enable a pumping effect to work. In use, the pumping action of the secondary impeller 244 reduces the pressure in region 216. The forces at work are shown in Figure 3. The spring 215 inside the button applies a force, labelled F_s , in an axially outward direction. There is also an axially directed force F_{PD} on the button 200 which results from the pressure difference between ambient pressure on the outside of button 200 (shown as the large inwardly directed arrow) and the pressure in region 216 inside the button 216. When the vacuum cleaner is switched off, the air in region 216 is also at ambient pressure and thus the only net force acting on the button is that due to the spring 215. However, when the vacuum cleaner is operating, the pressure in region 216 is less than ambient due to the partial evacuation of air from region 216 by the secondary impeller 244. This pressure difference causes an axially inwardly directed force acting on the button. When the impeller is rotating at normal speeds, i.e. around 25-30Krpm, the inwardly directed force F_{PD} , which is related to the

pressure difference between ambient and the region inside the button 200, is insufficient to overcome the axially outwardly-directed biasing force of the spring F_s .

Thus, the button 200 remains in the open position and air continues to flow to the impeller 240 to operate the brush bar.

5

When the airflow path through the main inlet becomes blocked in some way, such as by an object becoming trapped in the ducting or by the suction inlet becoming sealed against a surface, an increased amount of air will flow through the air inlet 120 to the turbine. This increase in airflow will increase the speed of rotation of the impeller 10 240 and secondary impeller 244. Other faults, such as a breakage of the drive belt 260, can also cause an increase in the rotational speed of the impeller 240. When the speed of rotation increases to a predetermined level, the pumping action of the secondary impeller 244 causes a sufficient pressure difference between ambient and the region 216 inside the button 200, that the axially inwardly directed force on the 15 button F_{PD} can overcome the outwardly directed biasing force of the spring, F_s . Thus, the button 200 moves into the closed position, as shown in Figure 4, and the diaphragm seal 210 presses against the inlet cap 220 to seal the inlet in an airtight manner. This prevents any air from reaching the impeller 240. As a result, the impeller 240 and the brush bar come to rest. Since the outlet side 280 of the turbine 20 chamber continues to be in communication with the suction duct between the main suction inlet 111 on the tool and the main body 70 of the vacuum cleaner, which continues to be at low pressure, region 216 remains sufficiently evacuated to maintain the button 200 in the closed position. The speed of rotation which causes the button to move into the closed position is determined by factors which include the strength of 25 the spring 215. We have found a maximum of speed of 45-50Krpm is an ideal limit, but this can, of course, be varied.

There are several ways in which the button 200 can be restored to the open position. Firstly, the button 200 can be pulled, by a user, to the open position. Secondly, a 30 valve can be provided to admit air into the airflow downstream of the turbine, or directly into the button 200 itself. This valve can be part of the tool or it can be a

suction release trigger on the wand of the machine. Thirdly, turning off the machine has the same effect as operating the suction release trigger. Turning off the machine removes the source of suction on side 280 of the turbine, which raises the pressure in region 216 to ambient. With no pressure difference across the button 200 there is no inwardly directed force to oppose the spring 215, and thus the spring 215 can push the button 200 outward.

In order to better explain the use of a suction release trigger, we can refer again to Figure 2. The suction release trigger 25 is a valve which is provided on most conventional machines. Often it is adjacent a handle of the wand. The suction release trigger 25 can be operated by a user to admit air into the wand and to reduce the level of suction at the tool 100. Normally, a user will operate this valve when something becomes stuck to the tool, such as a curtain. Air is admitted into the airflow path via the valve 25 and the object which has been 'stuck' to the tool is released. Operating the suction release trigger can also be used to restore the button 200 on the tool 100 to the open position and thus restart the turbine 240. The suction release valve 25 should admit a sufficient amount of air into the main flow path, lowering the pressure difference across the button 200 sufficiently that the spring 215 can push the button 200 into the open position.

Figures 6 and 7 show some further embodiments of the tool in which valves are provided. In Figure 6 a valve is mounted in button 200 itself. The valve comprises a further button 300 which is ordinarily biased into a closed position by spring 310. The spring 310 acts between flange 301 and the outer surface of button 200. In use, a user can displace the button 300, in the direction shown by the double-headed arrow, to admit air into the region 216 inside the button 200. This will raise the pressure in region 216 towards ambient, thus reducing the pressure difference force F_{PD} . When the value of F_{PD} is reduced sufficiently, the spring force F_s will overcome the inwardly directed force F_{PD} and the button 200 will move to its open position, as shown in Figure 3.

Figure 7 shows a scheme where a manually operable valve is mounted downstream of the turbine 240, as part of the tool 100. A button 320 is ordinarily biased into a closed position, as shown, by spring 330. The spring 330 acts between a step on the axially innermost end of button 320 and surface 322 of the chamber in which the button lies.

- 5 In use, a user can displace the button 320 to admit air through inlet 340 into the region 280 downstream of the turbine. The region inside button 200' is in communication with the region 280 into which the air is bled by button 320. Thus, the force F_{PD} due to evacuation of the button 200' will be reduced. When the value of F_{PD} is reduced sufficiently, the spring force F_s will overcome the inwardly directed force F_{PD} and the
10 button 200' will move to its open position, as shown in Figure 3.

- Button 320 can also act as an automatic bleed valve, i.e. the button 320 automatically moves into the open position in response to the flow of air along the passage 280. In a similar way to how the region inside button 200 (200') can be partially evacuated by
15 the pumping effect of the secondary impeller 244, the region inside button 320 is evacuated by the flow of air along passage 280. When button 320 is evacuated sufficiently, it moves into the open position and admits air into the region 280 downstream of the turbine. This has the effect of slowing down the turbine 240. Of course, if the amount of air which is bled into the region 280 by button 320 is
20 insufficient to prevent the turbine 240 from overspeeding, the button 200' will close to seal off the air inlet to the turbine.

- The arrangement shown on the right hand side of Figure 7 (i.e. button 320, spring 330, inlet 340) can be used on its own, without the button 200' on the inlet to the turbine
25 240. This would provide a speed limiting function for the turbine 240, without the ability to turn the turbine off.

- Figure 7 shows another modification to the tool. The inlet seal is an annular cap 350 which can seal the inlet by pressing against region 355 of the turbine housing. This
30 alternative is less appealing than the one shown in Figures 3 and 4 since the surfaces which seal against one another, i.e. the inside face of seal 350 and surface 355, are

exposed to dirt-laden air, compared to Figure 3, where the sealing surfaces are only exposed to air which has passed through a mesh screen.

From the above, it will be clear that button 200 can automatically move into a closed position and seal the air inlet to the turbine when the turbine rotates too quickly. Another useful feature of this arrangement is that a user can manually press the button 200 into the closed position should they wish to turn off the brush bar, e.g. when cleaning hard floors or delicate surfaces. To manually turn off the brush bar, a user simply pushes button 200, against the bias of spring 215, and momentarily holds the button 200 in the closed position. Pushing the button 200 evacuates region 216 inside the button 200 in the same manner achieved by the secondary impeller 244 during an overspeed condition. The brush bar can be turned on again in the same manner as previously described.

One of the problems with a turbine-driven tool which has a dedicated inlet for air to drive the turbine is that too great a proportion of the incoming air can flow into the tool via the main inlet rather than through the turbine. When viewed in terms of the amount of resistance experienced by the airflow, the path through the main inlet offers a lower resistance than the path through the turbine inlet.

Referring to Figures 8 - 11, a restricting device 800 is positioned in the outlet duct from the brush bar housing 110. The restricting device serves to restrict the flow of air from the brush bar housing. The restricting device is designed to distribute incoming air between the main and turbine inlets in a satisfactory ratio. We have found that allowing a ratio of between one quarter airflow through the turbine to three quarters airflow through the main inlet and one third airflow through the turbine to two thirds airflow through the main inlet provides good results.

In the embodiment shown in Figures 8 - 11 the restricting device 800 has a base 815 with fixings 816, 817 which push fit into the wall 892 of the discharge outlet so as to secure the restricting device 800 in place. A loop 805, 810 of material is secured to

the base 815. The loop has a first part 805, which will be called a guide vane, which is inclined with respect to the base 815. A generally semi-circularly shaped element 810 joins the guide vane 805 with the base 815. The guide vane 805 and semi-circular element 810 can be moulded integrally with one another, and with the base 815, from a material which is resiliently flexible. A rubber compound such as EPDM is suitable. In use, the guide vane 805 remains in an inclined position to the base 815, and hence the walls 892, 893 of the discharge outlet, and serves to restrict the cross-section of the outlet, as can be seen in Figure 11. Reference numeral 896 represents the part of the outlet aperture through which air can flow. The angle of inclination of guide vane 805, in use, will usually be less than what is shown in Figure 8 due to the force caused by the flow of air through the outlet, but it will still be inclined. In the event that a large piece of debris flows along the outlet duct, the guide vane 805 rotates towards wall 892, adopting a position which is more parallel with the base member 815. Narrowed portion 806 between guide vane 805 and base 815 acts as a hinge to permit guide vane 805 to rotate. Once the debris has passed, the guide vane 805 returns to its original position, due to the resilience of element 810. Vertical walls 894 of the discharge outlet lie alongside each side of the device 800 and thus the area inside the loop is not exposed to dirt-laden airflow.

The restricting device can be implemented in other ways. Figures 12 and 13 show two alternative embodiments. In Figure 12, the guide vane 835 is a planar element which is mounted to wall 892 of the discharge outlet by a torsion spring 836. The spring is received in a pocket 832 in the wall of the discharge outlet. The spring 836 serves to maintain the vane 835 in an inclined position with respect to the wall. The space beneath the guide vane 835 is filled by a generally wedge-shaped piece of foam material 840 which can readily compress when the guide vane 835 pivots towards the wall. The foam material 840 prevents any debris from accumulating beneath the guide vane 835, which would prevent the guide vane 835 from operating.

In the embodiment shown in Figure 13 the guide vane is again a planar element 850. However, there is no spring. Instead, the resilience is supplied by a generally wedge-

shaped piece of material 855 which serves the dual purpose of maintaining element 850 in an inclined position and preventing the ingress of any dirt beneath the element.

The lower surface 856 of material 855 can be secured to the wall 892 of the discharge outlet by bonding or other suitable means. Element 850 can be secured to the upper surface of material 855 by similar means. The wedge shape of the material 855 ensures that the element 850 will pivot about end 851 when any debris strikes the element 850. In a further alternative, element 850 is not provided as a separate element, but is simply the upper, exposed surface of the material 855. In this case, the material 855, or at least the exposed surface, should be suitably resistant to the passage of debris over the surface.

In the further alternative embodiment shown in Figure 14 the restriction in the outlet duct 893 is achieved by a plurality of flexible flaps 861, 862 which hang from the upper wall of the duct 893. The length of the flaps 861, 862, the rigidity of the material from which the flaps are made and the flexibility of the connection between the flaps 861, 862 and the wall of the duct 893 determine the extent to which the cross-section of the outlet duct will be restricted. Figure 14 shows two of the flaps 861 being displaced by a large item of debris. It will be noted that not all of the flaps need move to allow the debris to pass along the duct. This has a benefit in maintaining the distribution of airflow between the main inlet and turbine inlet. Of course, in a simpler form of this arrangement, there need only be a single such flap 861 which extends fully, or only part-way, across the duct 893. The arrangements shown in Figures 8-13 can also be implemented in a way in which a plurality of similar (or dissimilar) parts are positioned across the duct 893, each part occupying only a portion of the total width of the duct 893 and being independently movable.

Various alternatives are possible to what has been described here. While the two replaceable brushes are preferable, in a simpler form of the tool there could only be a single brush bar which is directly driven by a belt passing around the outer surface of the brush bar. The brush bar can be driven at a position which is offset from the centre.

The preferred way of operating the button 200 is to provide a secondary impeller on the rear face of the impeller 240. Depressions 242 and ribs 243 form this secondary impeller. However, the following alternative schemes are also possible, and are intended to be included in the scope of the invention. Instead of using the rear face of impeller 240, a second, dedicated, impeller could be mounted on the drive shaft 245 at a position which is axially offset from the main impeller 240. Obviously, this would increase the cost and size of the tool. As a further alternative, the rear face of the impeller could be flat, rather than having depressions 242 and ribs 243. As a still further alternative, the means for evacuating the region 216 inside the button can be a venturi in the main airflow path to or from the turbine.

The embodiments show a horizontally mounted turbine assembly with the button 200 on one side of the tool. It is possible to mount the turbine vertically within the housing of the tool so that the button 200 is positioned on the upper face of the tool. This arrangement allows the button 200 to be equally accessible to left and right handed users.

Claims

1. A vacuum cleaning head comprising a housing, an agitator for agitating a floor surface which is rotatably mounted in the housing, an air turbine for driving the agitator, an air inlet for admitting air to the turbine, and a control for preventing rotation of, or reducing the speed of rotation of, the agitator, wherein the control is responsive to the speed of rotation of the turbine, or flow of air to or through the turbine.
2. A vacuum cleaning head according to claim 1 wherein the control is movable between an open position, in which it admits air to the turbine, and a closed position in which it prevents air from reaching the turbine.
3. A vacuum cleaning head according to claim 2 wherein the control is biased into the open position.
4. A vacuum cleaning head according to claim 2 or 3 wherein the control is also movable into the inoperable position by a user.
5. A vacuum cleaning head according to any one of claims 2 to 4 wherein the control comprises a movable part having an interior volume which communicates with the main airflow path to the turbine, the movable part being responsive to a pressure difference between the interior volume and ambient air.
6. A vacuum cleaning head according to claim 5 wherein the interior volume of the movable part communicates with the main airflow path to the turbine via a restricted airflow path.
7. A vacuum cleaning head according to claim 6 wherein the restricted airflow path comprises an apertured plate.

8. A vacuum cleaning head according to any one of claims 5 to 7 further comprising means for drawing air from the interior volume of the movable part.

5 9. A vacuum cleaning head according to claim 8 wherein the drawing means comprises a second turbine.

10. A vacuum cleaning head according to claim 9 wherein the second turbine forms part of the rear face of the turbine.

10 11. A vacuum cleaning head according to claim 10 wherein the second turbine comprises depressions and ribs on the rear face of the turbine.

12. A vacuum cleaning head according to claim 8 wherein the drawing means comprises a venturi in the airflow path upstream or downstream of the turbine, the
15 interior volume of the movable part communicating with the venturi.

13. A vacuum cleaning head according to any one of claims 5 to 12 further comprising a valve for admitting air into the interior of the movable part whereby to reopen the air inlet.

20

14. A vacuum cleaning head according to any one of claims 2 to 13 further comprising a seal for sealing the inlet in the closed position.

15. A vacuum cleaning head according to any one of claims 2 to 14 further
25 comprising a valve for admitting air to the cleaning head whereby to reopen the air inlet.

16. A vacuum cleaning head according to claim 15 wherein the valve admits air to a region downstream of the turbine.

30

17. A vacuum cleaning head according to claim 16 wherein the valve is positioned on the opposite side of the housing to the control.

5 18. A vacuum cleaning head comprising a housing, an agitator for agitating a floor surface, a chamber in the housing for rotatably receiving the agitator, an opening in the chamber, adjacent the agitator, for facing a floor surface, an air turbine for driving the agitator, an air inlet in the housing for admitting clean air to drive the turbine, a restricting device for fitting in a discharge outlet from the chamber, and wherein the
10 restricting device is arranged to be movable between a restrictive position, in which it serves to restrict the cross-section of the discharge outlet, and an open position, in which it restricts the cross-section of the discharge outlet to a lesser extent, the restricting device being movable by the flow of debris from the chamber.

15 19. A vacuum cleaning head according to claim 18 wherein the restricting member comprises a guide vane which projects outwardly from a wall of the discharge outlet.

20 20. A vacuum cleaning head according to claim 19 wherein the guide vane is resiliently biased into the restrictive position.

21. A vacuum cleaning head according to claim 20 wherein the guide vane is connected to a wall of the discharge outlet by a resilient member.

22. A vacuum cleaning head according to claim 21 wherein the resilient member is a spring.
25

23. A vacuum cleaning head according to claim 21 wherein the guide vane is mounted on, or is the exposed surface of, a piece of resilient material which is secured to a wall of the discharge outlet.

30 24. A vacuum cleaning head according to claim 23 wherein the piece of resilient material is generally wedge-shaped.

25. A vacuum cleaning head according to any one of claims 19 to 24 further comprising a shielding member for shielding the space beneath the guide vane.
- 5 26. A vacuum cleaning head according to claim 24 wherein the shielding member is a piece of compressible material which fits beneath the guide vane.
27. A vacuum cleaning head according to claim 26 wherein the compressible material is foam or foam-like material.
- 10 28. A vacuum cleaning head according to any one of claims 19 to 27 wherein the downstream end of the guide vane is connected to the wall of the discharge outlet by a flexible member.
- 15 29. A vacuum cleaning head according to claim 28 wherein the guide vane and flexible member are formed integrally with one another from a resiliently flexible material.
30. A vacuum cleaning head according to any one of the preceding claims wherein
20 there are a plurality of restricting devices arranged across the discharge outlet.
31. A vacuum cleaner incorporating a vacuum cleaning head according to any one of the preceding claims.
- 25 32. A vacuum cleaning head or a vacuum cleaner substantially as described herein with reference to the accompanying drawings.

ABSTRACT

A Vacuum Cleaning Head

5

A vacuum cleaning head (100) comprises a rotatable brush bar (112) and an air turbine (240) for driving the brush bar (112). An air inlet (120) admits air to drive the turbine. A button (200) is movable between an open position, in which it admits air to the turbine (240), and a closed position in which it closes the inlet (120) and prevents
10 air from reaching the turbine (240). The button (200) is movable in response to the speed of rotation of the turbine (240), or flow of air to or through the turbine (240) exceeding a predetermined limit.

A restricting device (800) is positioned in the flow duct (893, Fig. 8) leading from the
15 main inlet (111) to the cleaning head and is movable between a restrictive position, in which it serves to restrict the cross-section of the discharge outlet, and an open position, in which it restricts the cross-section of the discharge outlet to a lesser extent. The restricting device (800) is movable by the passage of debris along the flow duct (893).

20

(Figures 1, 8)

1/9

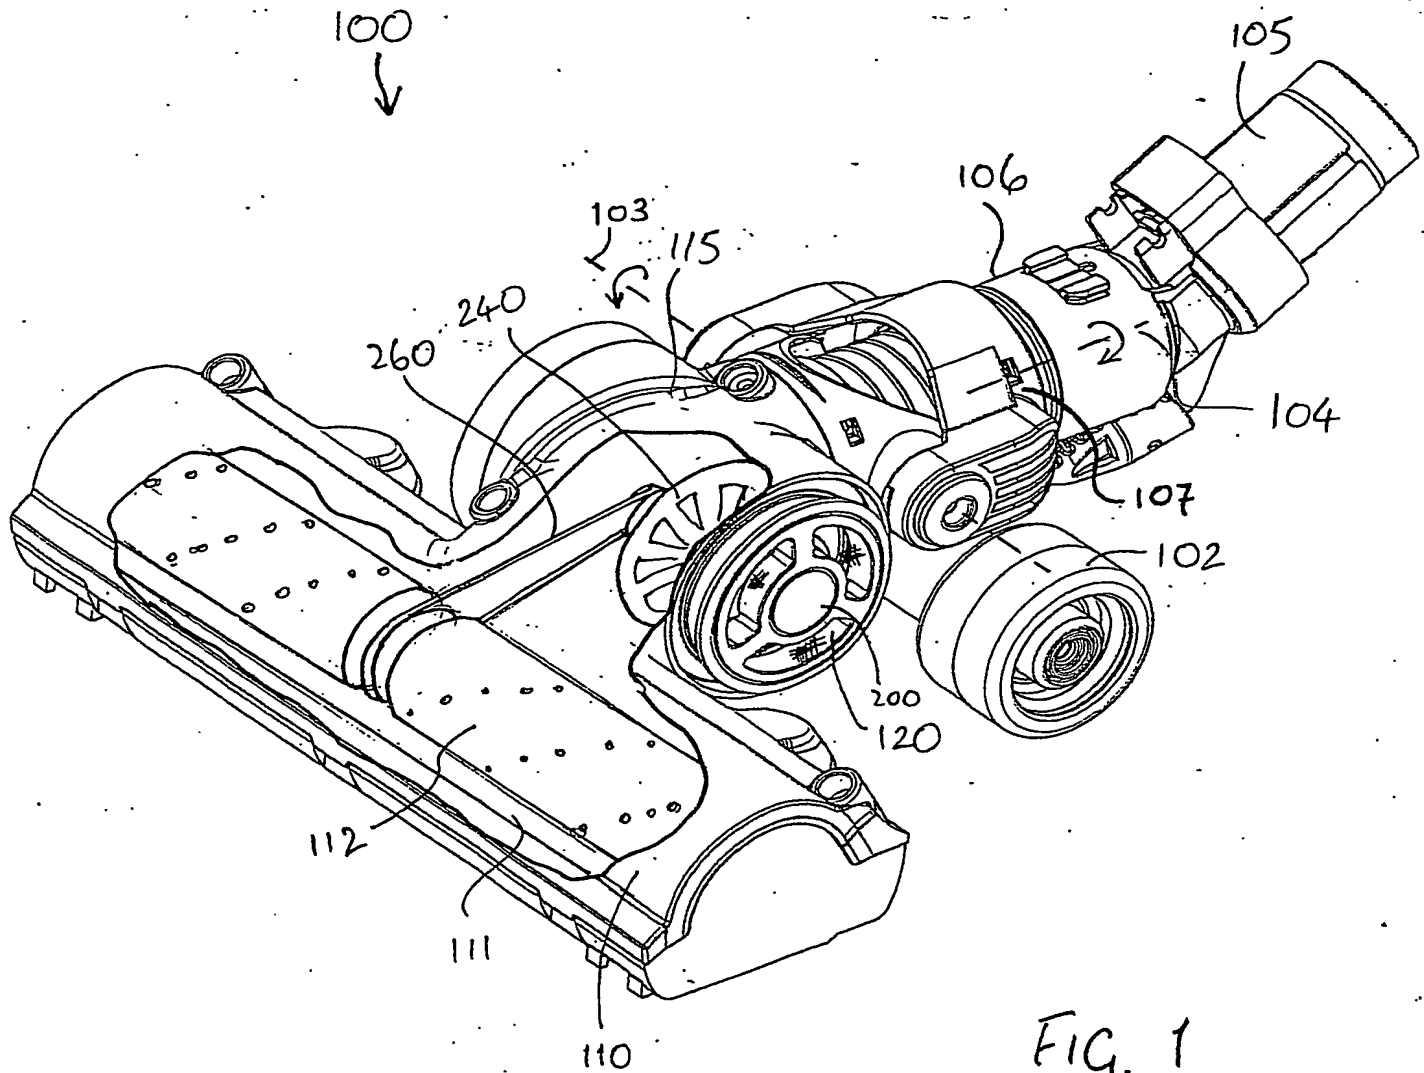


FIG. 1

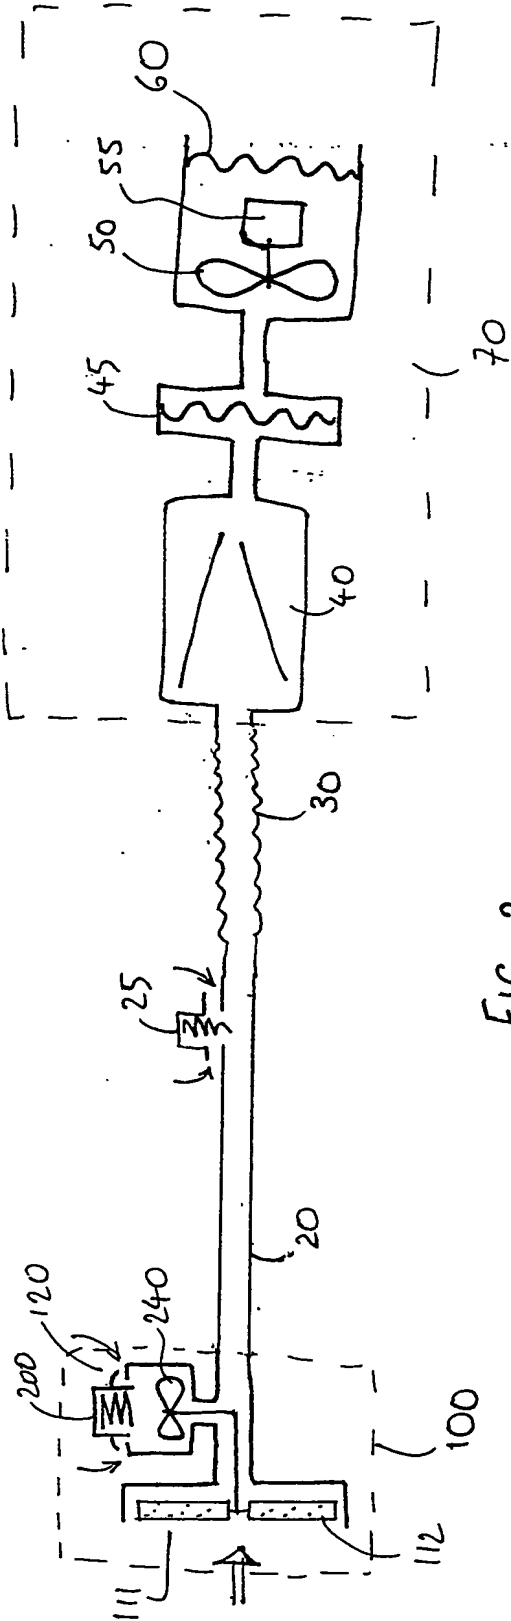


FIG. 2

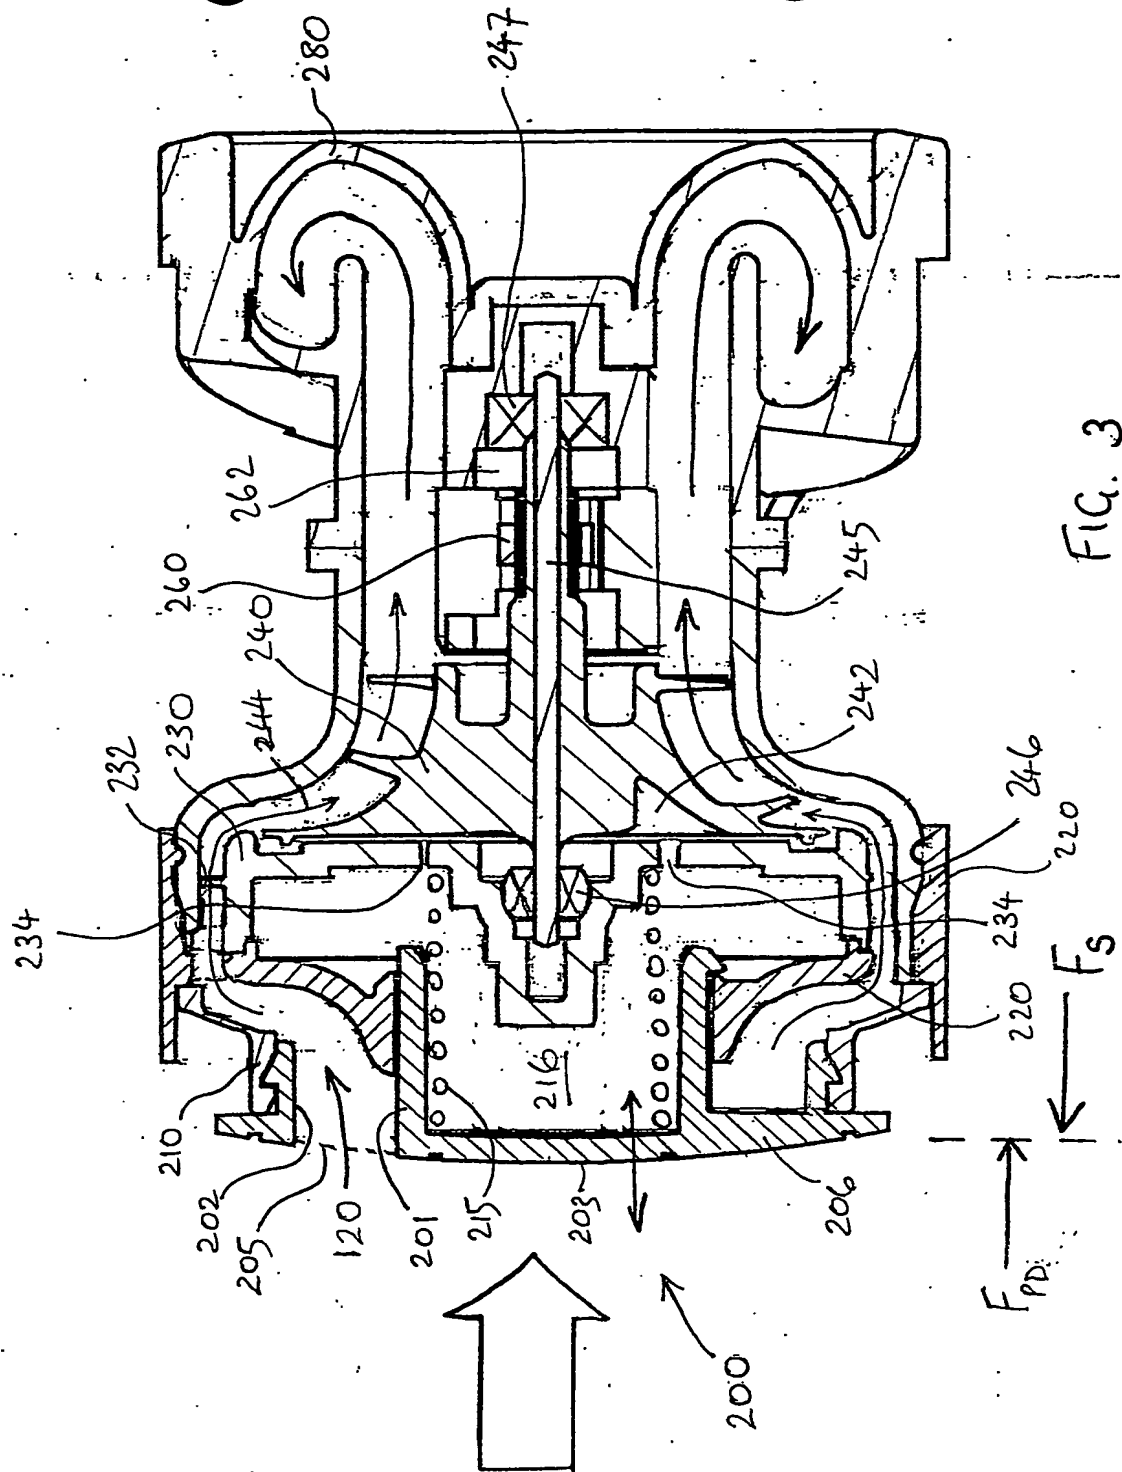


FIG. 3

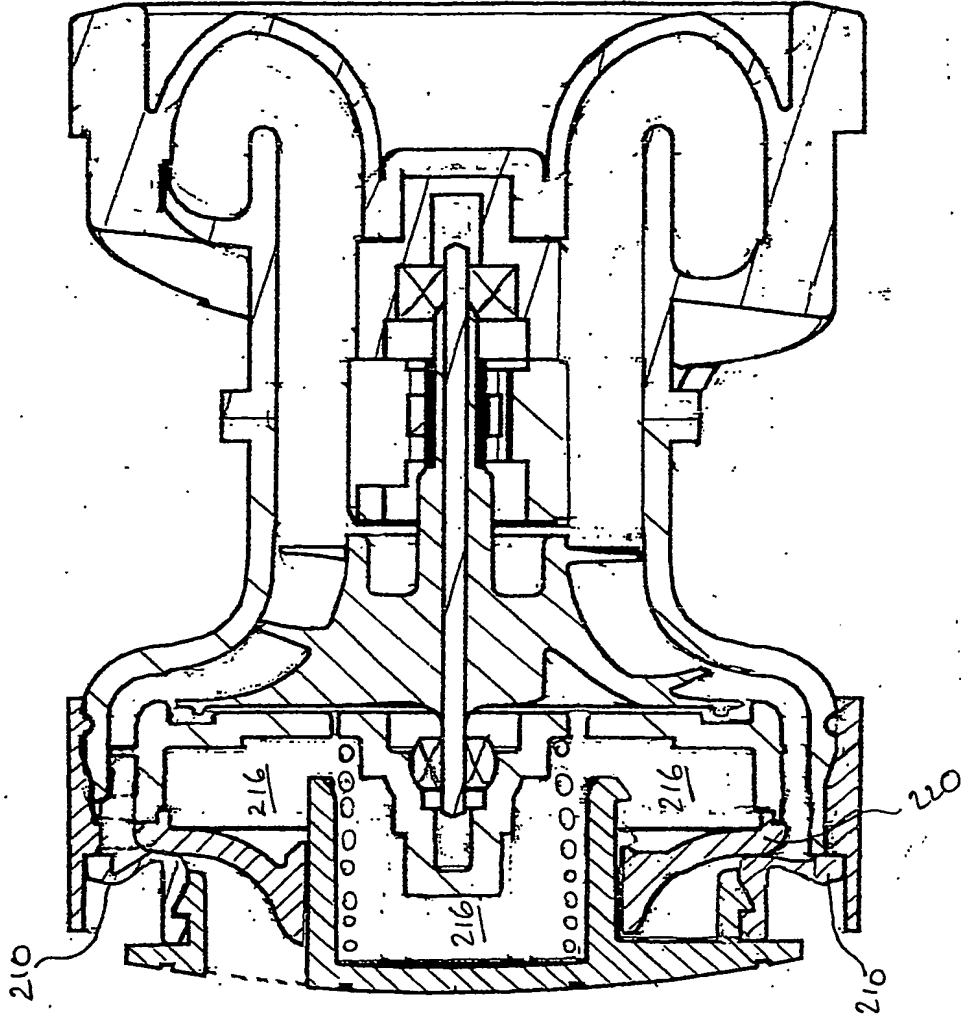


FIG. 4

5/9

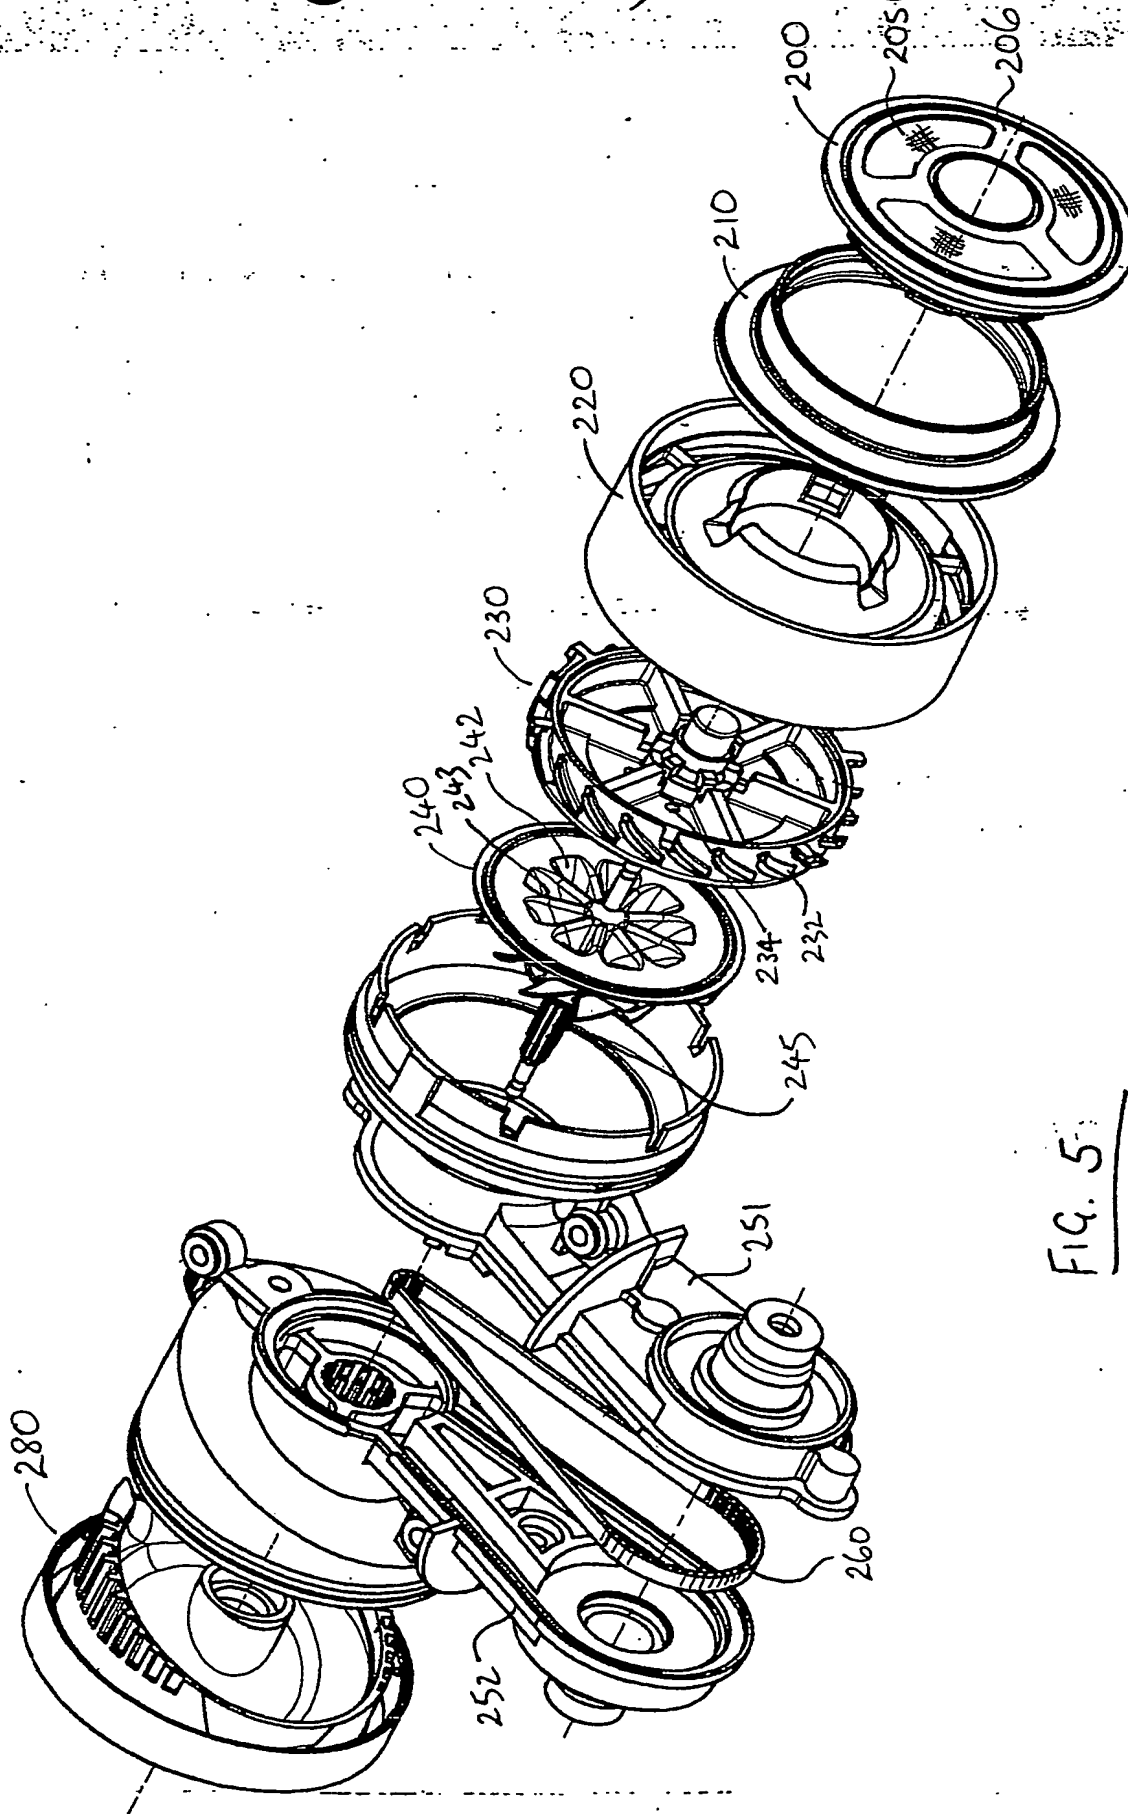


FIG. 5

6/9

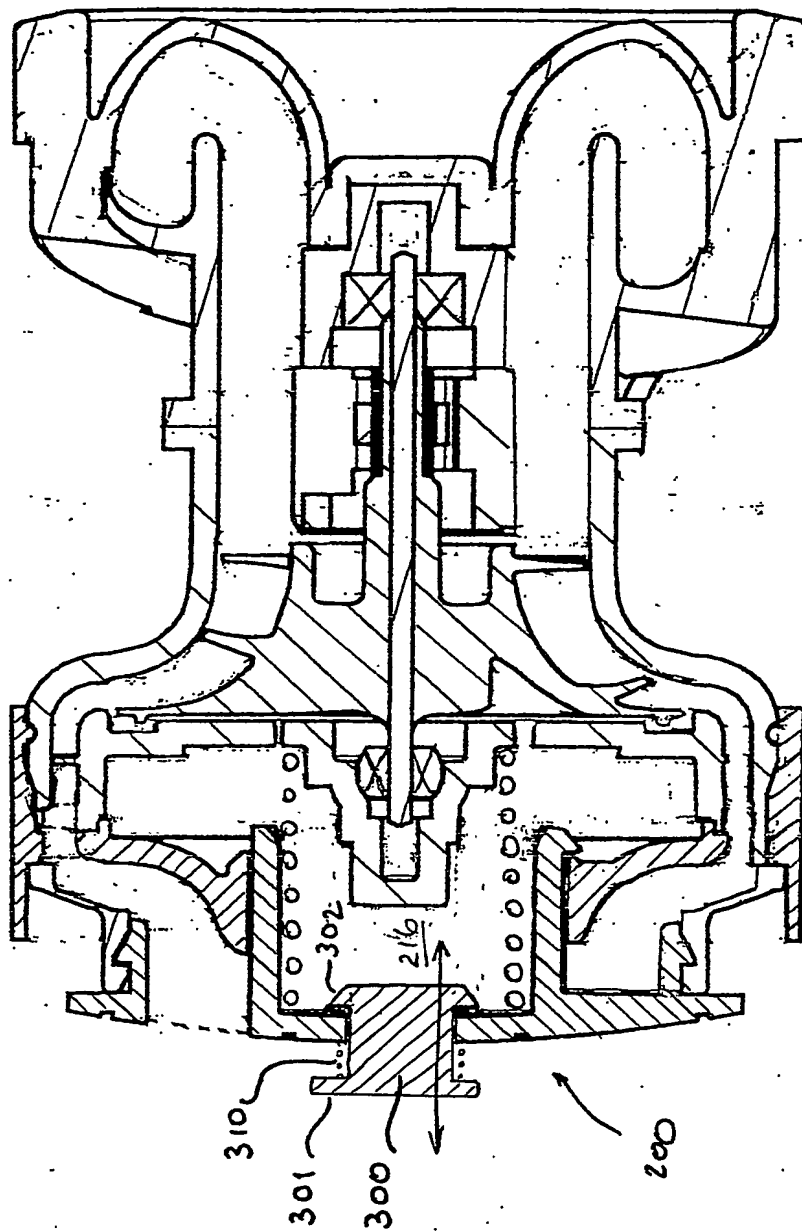


FIG. 6

7/9

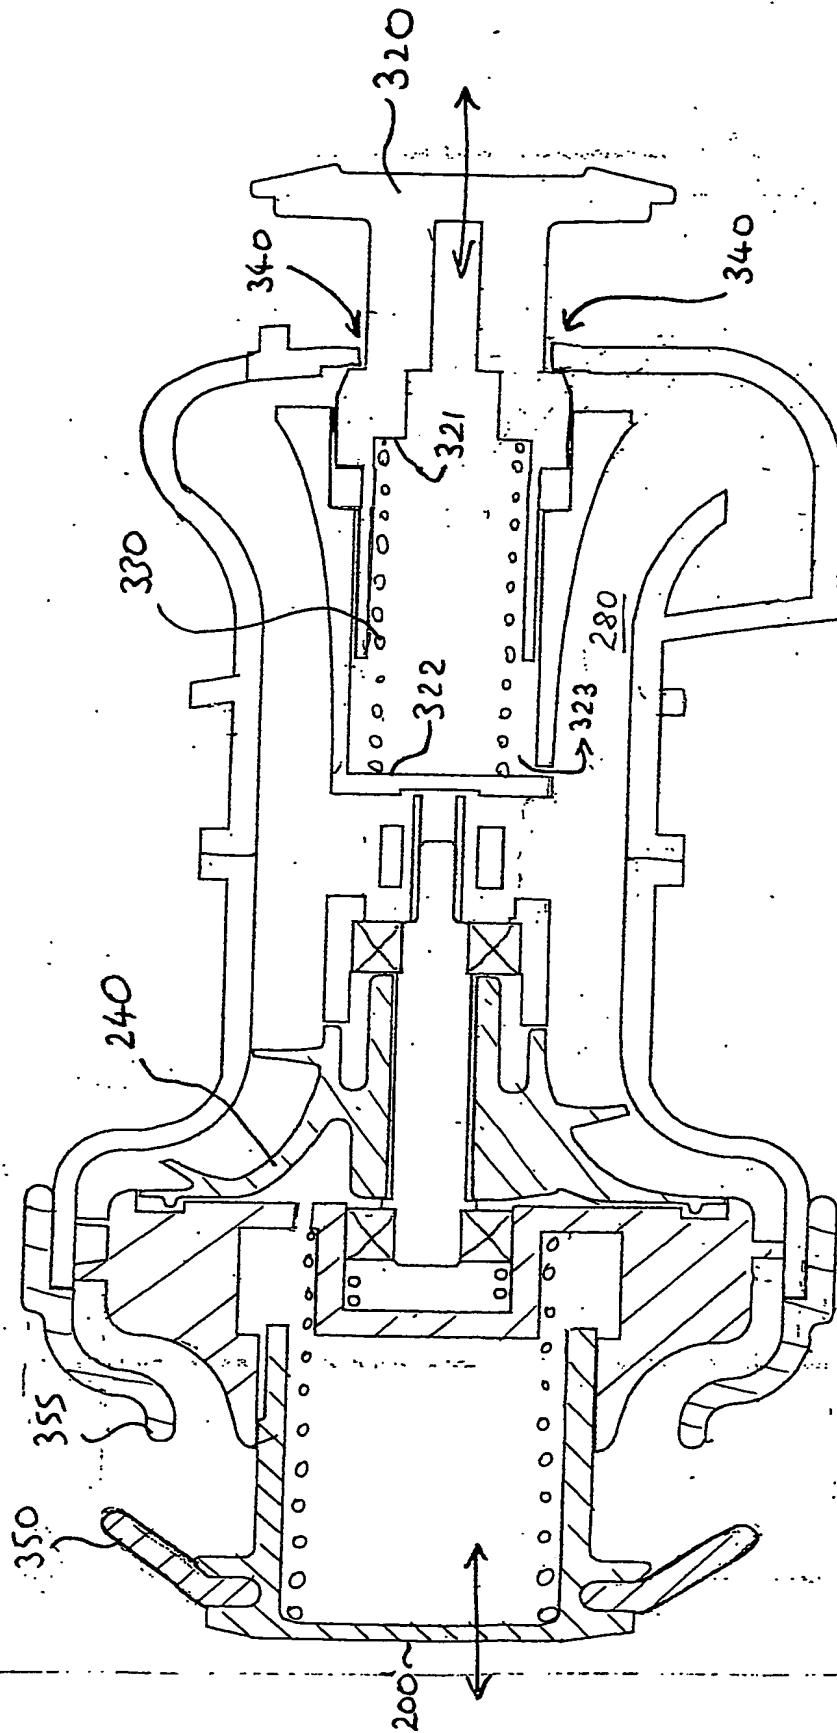
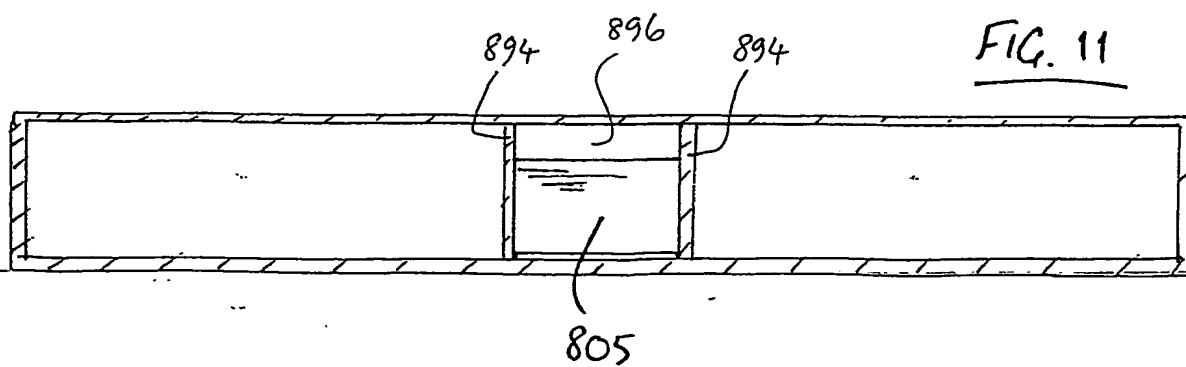
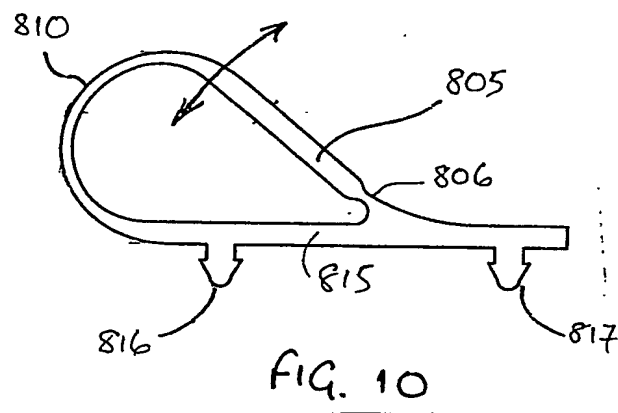
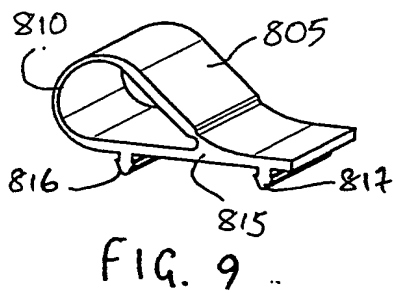
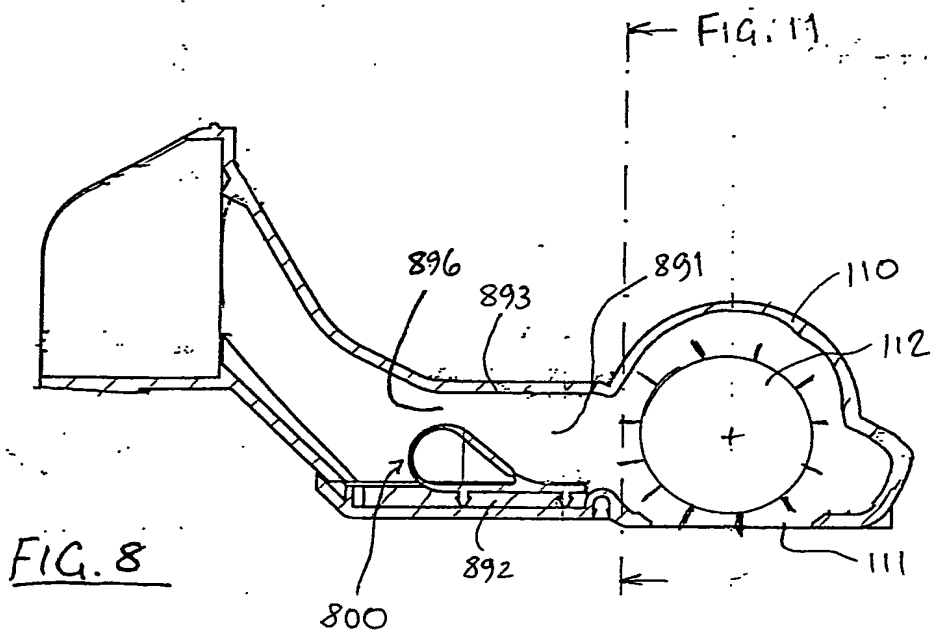


FIG. 7



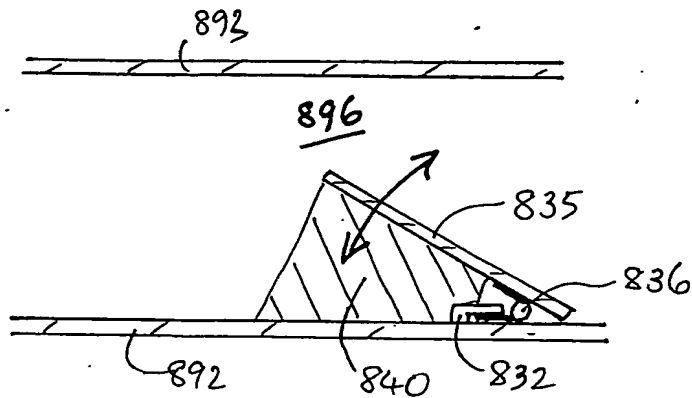


FIG. 12

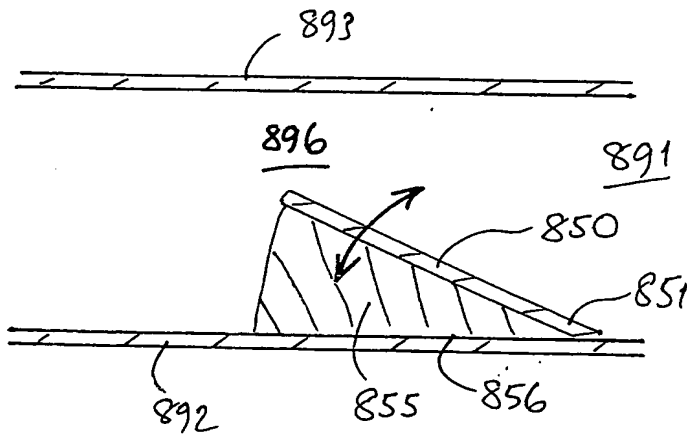


FIG. 13

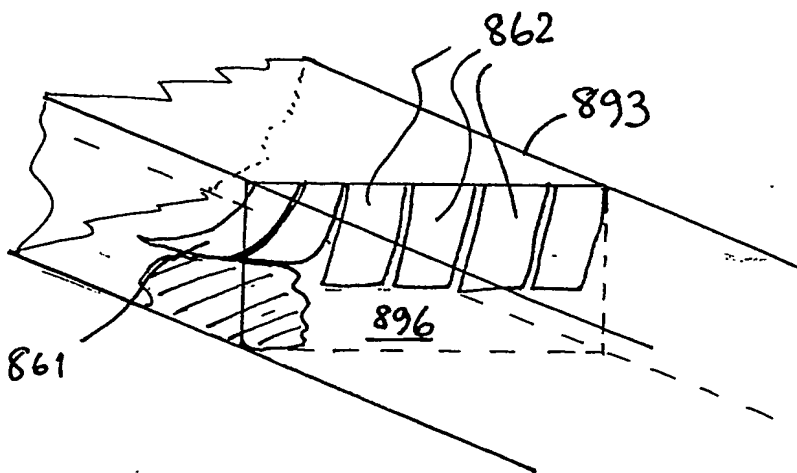


FIG. 14

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.